


Grade 80 Chain is designed for Chain Slings for industrial lifting applications.

It is made from alloy steel, hardened and tempered.

It has a high resistance to impact and meets critical requirements of AS2321 "Short link Chain for lifting purposes".

- Made in Kettenfabrik Chain manufacture in Germany with Admission (H34)
- Sizes available from 6mm to 32mm.
- Marked with Chain grade with traceability mark.
- Made from G80 alloy steel with safety factor of 4 to 1
- Test Certificates available upon request.
- Conforms to AS2321.

CODE		SIZE	WLL	DIMENSIONS (m)	
full drum	cut length	mm	tonne	B	C
101506	101406	6.3	1.12	21	18
101507	101407	7.1	1.5	24	21
101508	101408	8	2	28	24
101510	101410	10	3.15	35	30
101513	101413	13	5.3	46	39
101516	101416	16	8	57	48
101520	101420	20	12.5	70	60
101522	101422	22	15	78	66
101526	101426	26	21.2	91	78
101526	101426	26	21.2	91	78

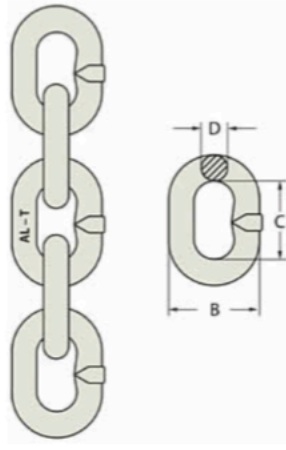

CHAIN DIA. mm	SINGLE LEG SLINGS			SLINGS OF 2, 3 OR 4 LEGS						ENDLESS SLINGS			
	STRAIGHT SLING	ADJUST-ABLE SLING without deration*	REEVED SLING	STRAIGHT SLING			REEVED SLING			BASKET SLING			REEVED SLING
				60°	90°	120°	60°	90°	120°	60°	90°	120°	
<b>MAXIMUM WORKING LOAD LIMITS IN TONNES OF 1000kg</b>													
6	1.1	1.1	0.8	1.9	1.6	1.1	1.5	1.2	0.8	1.5	1.2	0.8	1.7
7	1.5	1.5	1.1	2.6	2.1	1.5	2.0	1.6	1.1	2.0	1.6	1.1	2.3
8	2.0	2.0	1.5	3.5	2.8	2.0	2.6	2.1	1.5	2.6	2.1	1.5	3.0
10	3.2	3.2	2.4	5.5	4.5	3.2	4.1	3.4	2.4	4.1	3.4	2.4	4.8
13	5.3	5.3	4.0	9.2	7.5	5.3	6.9	5.6	4.0	6.9	5.6	4.0	8.0
16	8.0	8.0	6.0	13.8	11.3	8.0	10.4	8.5	6.0	10.4	8.5	6.0	12.0
20	12.5	12.5	9.4	21.6	17.6	12.5	16.3	13.3	9.4	16.3	13.3	9.4	18.8
22	15.0	15.0	11.3	26.0	21.2	15.0	19.5	15.9	11.3	19.5	15.9	11.3	22.5
26	21.2	21.2	15.9	36.7	29.9	21.2	27.6	22.5	15.9	27.6	22.5	15.9	31.8
32	31.5	31.5	23.6	54.5	44.4	31.5	41.0	33.4	23.6	41.0	33.4	23.6	47.3