

RPC Carriage Mounted Roll Prong

RPC Carriage Mounted Roll Prong

Carriage Mounted Roll Prongs suitable for carpet, vinyl, fabric or similar products.



Units are available for Class II, III and IV Forklift carriages, along with pin mounted.

All "QR" model Roll Prongs feature "Quick Release" lower Carriage Hooks and a spring loaded locating pin for easy installation.

Prongs are manufactured from high tensile steel and can be made to any length.

The 'lost load' on the Class II Roll Prong is 100mm and on the Class III Roll Prong is 200mm. For Class IV or V mountings, please ask for drawings of mounting plate designs and specifications.

The standard finish on all Roll Prongs is painted enamel.

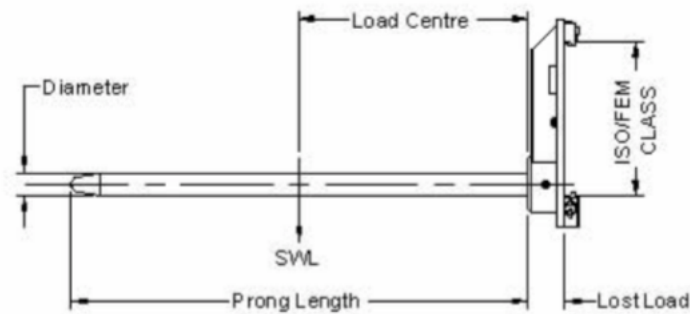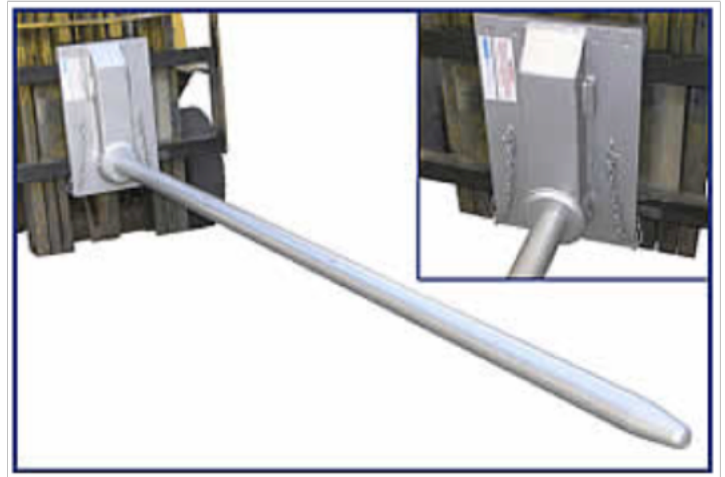

Type	Mounting Class	Diameter (mm)	Prong Length (mm)	SWL (kg)	Load Centre (mm)	Weight (kg)
RPC-QR2-40-1200	Class II	40	1200	200	600	63
RPC-QR2-50-1800	Class II	50	1800	250	900	79
RPC-QR2-60-2800	Class II	60	2800	340	1400	113
RPC-QR2-70-2800	Class II	79	2800	510	1400	135
RPC-QR2-80-2800	Class II	80	2800	850	1400	166
RPC-QR3-70-2800	Class III	70	2800	510	1400	190
RPC-QR3-80-2800	Class III	80	2800	850	1400	220
RPC-QR3-100-2800	Class III	100	2800	1700	1400	282
RPC-BH4-125-1200	Class IV	125	1200	6500	600	280
RPC-BH4-125-2800	Class IV	125	2800	2785	1400	440
RPC-BH4-150-1200	Class IV	150	1200	10,000	600	360
RPC-BH4-150-2800	Class IV	150	2800	4285	1400	565
RPC-PM-200-1200	Pin Mount	200	1200	13,000	600	1400